

BSS138AKA

60 V, single N-channel Trench MOSFET

29 April 2015

Product data sheet

1. General description

N-channel enhancement mode Field-Effect Transistor (FET) in a small SOT23 (TO-236AB) Surface-Mounted Device (SMD) plastic package using Trench MOSFET technology.

2. Features and benefits

- Very fast switching
- Trench MOSFET technology
- ESD protection
- Low threshold voltage
- AEC-Q101 qualified

3. Applications

- Relay driver
- High-speed line driver
- Low-side loadswitch
- Switching circuits

4. Quick reference data

Table 1. Quick reference data

Symbol	Parameter	Conditions		Min	Тур	Max	Unit
V_{DS}	drain-source voltage	T _j = 25 °C		-	-	60	V
V _{GS}	gate-source voltage			-20	-	20	V
I _D	drain current	V _{GS} = 10 V; T _{amb} = 25 °C	[1]	-	-	200	mA
Static characte	Static characteristics						
R _{DSon}	drain-source on-state resistance	V_{GS} = 10 V; I_{D} = 100 mA; pulsed; $t_{p} \le 300 \ \mu s; \ \delta \le 0.02; \ T_{j}$ = 25 °C		-	2.7	4.5	Ω

^[1] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for drain 1 cm².



60 V, single N-channel Trench MOSFET

5. Pinning information

Table 2. Pinning information

Pin	Symbol	Description	Simplified outline	Graphic symbol
1	G	gate	3	D I
2	S	source		
3	D	drain	1 2 TO-236AB (SOT23)	G S 017aaa255

6. Ordering information

Table 3. Ordering information

Type number	Package				
	Name	Description	Version		
BSS138AKA	TO-236AB	plastic surface-mounted package; 3 leads	SOT23		

7. Marking

Table 4. Marking codes

Type number	Marking code [1]
BSS138AKA	%JL

[1] % = placeholder for manufacturing site code

60 V, single N-channel Trench MOSFET

8. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions		Min	Max	Unit
V _{DS}	drain-source voltage	T _j = 25 °C		-	60	V
V_{GS}	gate-source voltage			-20	20	V
I _D	drain current	V _{GS} = 10 V; T _{amb} = 25 °C	[1]	-	200	mA
		V _{GS} = 10 V; T _{amb} = 100 °C	[1]	-	125	mA
I _{DM}	peak drain current	T_{amb} = 25 °C; single pulse; $t_p \le 10 \mu s$		-	800	mA
P _{tot}	total power dissipation	T _{amb} = 25 °C	[2]	-	300	mW
			[1]	-	360	mW
		T _{sp} = 25 °C		-	1060	mW
Tj	junction temperature			-55	150	°C
T _{amb}	ambient temperature			-55	150	°C
T _{stg}	storage temperature			-65	150	°C
Source-dra	in diode			-	-	
Is	source current	T _{amb} = 25 °C	[1]	-	200	mA

- Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for drain 1 cm².
- [2] Device mounted on an FR4 Printed-Circuit Board (PCB), single-sided copper, tin-plated and standard footprint.




Fig. 1. Normalized total power dissipation as a function of ambient temperature

$$P_{der} = \frac{P_{tot}}{P_{tot(25\%)}} \times \ \mathbf{100} \ \%$$




Fig. 2. Normalized continuous drain current as a function of ambient temperature

$$I_{der} = \frac{I_D}{I_{D(25^{\circ}C)}} \times 100 \%$$

BSS138AKA

All information provided in this document is subject to legal disclaimers.

60 V, single N-channel Trench MOSFET

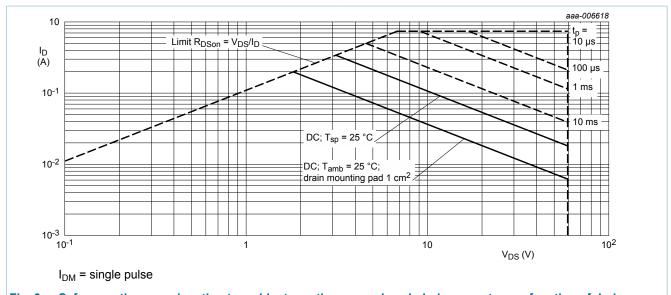


Fig. 3. Safe operating area; junction to ambient; continuous and peak drain currents as a function of drain-source voltage

9. Thermal characteristics

Table 6. Thermal characteristics

Symbol	Parameter	Conditions		Min	Тур	Max	Unit
fro	thermal resistance in free ai from junction to ambient	in free air [1	[1]	-	350	400	K/W
			[2]	-	300	340	K/W
R _{th(j-sp)}	thermal resistance from junction to solder point			-	-	115	K/W

- [1] Device mounted on an FR4 PCB, single-sided copper, tin-plated and standard footprint.
- [2] Device mounted on an FR4 PCB, single-sided copper, tin-plated, mounting pad for drain 1 cm².

60 V, single N-channel Trench MOSFET

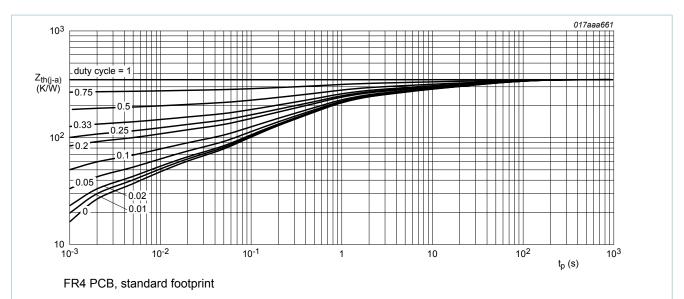


Fig. 4. Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

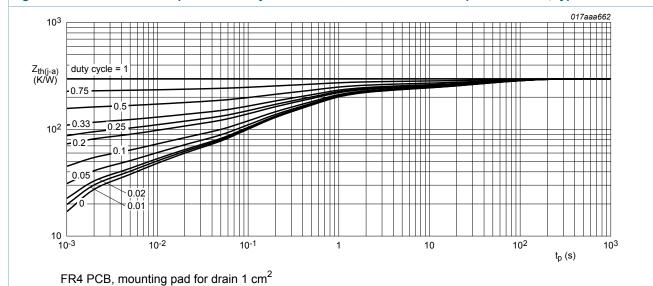


Fig. 5. Transient thermal impedance from junction to ambient as a function of pulse duration; typical values

60 V, single N-channel Trench MOSFET

10. Characteristics

Table 7. Characteristics

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Static char	acteristics					
$V_{(BR)DSS}$	drain-source breakdown voltage	I _D = 250 μA; V _{GS} = 0 V; T _j = 25 °C	60	-	-	V
V_{GSth}	gate-source threshold voltage	$I_D = 250 \text{ A}; V_{DS} = V_{GS}; T_j = 25 \text{ °C}$	0.8	1.2	1.5	V
	drain leakage current	V _{DS} = 60 V; V _{GS} = 0 V; T _j = 25 °C	-	-	1	μA
		V _{DS} = 60 V; V _{GS} = 0 V; T _j = 150 °C	-	-	10	μA
I _{GSS}	gate leakage current	V _{GS} = 20 V; V _{DS} = 0 V; T _j = 25 °C	-	-	3.5	μA
		V_{GS} = -20 V; V_{DS} = 0 V; T_j = 25 °C	-	-	-3.5	μA
		V _{GS} = 10 V; V _{DS} = 0 V; T _j = 25 °C	-	-	1	μA
		V_{GS} = -10 V; V_{DS} = 0 V; T_j = 25 °C	-	-	-1	μA
		V _{GS} = 4.5 V; V _{DS} = 0 V; T _j = 25 °C	-	-	0.5	μΑ
		V_{GS} = -4.5 V; V_{DS} = 0 V; T_j = 25 °C	-	-	-0.5	μΑ
R _{DSon} drain-source resistance	drain-source on-state resistance	V_{GS} = 10 V; I_{D} = 100 mA; pulsed; $t_{p} \le 300 \ \mu s; \ \delta \le 0.02; \ T_{j}$ = 25 °C	-	2.7	4.5	Ω
		V_{GS} = 10 V; I_D = 100 mA; pulsed; $t_p \le 300 \ \mu s; \ \delta \le 0.02; \ T_j = 150 \ ^{\circ}C$	-	5.5	9.2	Ω
		V_{GS} = 4.5 V; I_{D} = 100 mA; pulsed; $t_{p} \le 300 \ \mu s; \ \delta \le 0.02; \ T_{j}$ = 25 °C	-	3	5.2	Ω
		V_{GS} = 2.5 V; I_{D} = 10 mA; pulsed; $t_{p} \le 300 \ \mu s; \ \delta \le 0.02; \ T_{j}$ = 25 °C	-	4	13	Ω
9 _{fs}	forward transconductance	V_{DS} = 10 V; I_{D} = 150 mA; pulsed; $t_{p} \le$ 300 µs; $\delta \le$ 0.02; T_{j} = 25 °C	320	-	-	mS
Dynamic cl	naracteristics		'			
Q _{G(tot)}	total gate charge	V _{DS} = 30 V; I _D = 150 mA; V _{GS} = 4.5 V;	-	0.39	0.51	nC
Q_{GS}	gate-source charge	T _j = 25 °C	-	0.1	-	nC
Q_{GD}	gate-drain charge		-	0.1	-	nC
C _{iss}	input capacitance	V _{DS} = 30 V; f = 1 MHz; V _{GS} = 0 V;	-	13	20	pF
C _{oss}	output capacitance	T _j = 25 °C	-	2.6	-	pF
C _{rss}	reverse transfer capacitance		-	1.1	-	pF
t _{d(on)}	turn-on delay time	V_{DS} = 40 V; R_{L} = 250 Ω ; V_{GS} = 10 V;	-	5	10	ns
t _r	rise time	$R_{G(ext)} = 6 \Omega$; $T_j = 25 °C$	-	6	-	ns
$t_{d(off)}$	turn-off delay time		-	36	72	ns

BSS138AKA

All information provided in this document is subject to legal disclaimers.

60 V, single N-channel Trench MOSFET

Symbol	Parameter	Conditions		Min	Тур	Max	Unit
t _f	fall time			-	22	-	ns
Source-drain diode							
V _{SD}	source-drain voltage	I_S = 115 mA; V_{GS} = 0 V; T_j = 25 °C		0.47	0.7	1.2	V




Fig. 6. Output characteristics: drain current as a function of drain-source voltage; typical values




Fig. 8. Drain-source on-state resistance as a function of drain current; typical values




Fig. 7. Sub-threshold drain current as a function of gate-source voltage




Fig. 9. Drain-source on-state resistance as a function of gate-source voltage; typical values

60 V, single N-channel Trench MOSFET




Fig. 10. Transfer characteristics: drain current as a function of gate-source voltage; typical values




Fig. 11. Normalized drain-source on-state resistance as a function of junction temperature; typical values

$$a = \frac{R_{DSon}}{R_{DSon(25^{\circ}C)}}$$






Fig. 12. Gate-source threshold voltage as a function of junction temperature



 $f = 1 MHz; V_{GS} = 0 V$

Fig. 13. Input, output and reverse transfer capacitances as a function of drain-source voltage; typical values

60 V, single N-channel Trench MOSFET



V_{GS}(pl)

V_{GS}(pl)

V_{GS}(th)

V_{GS}

Q_{GS1}
Q_{GS2}
Q_{GG}(tot)

017aaa137

Fig. 15. Gate charge waveform definitions

Fig. 14. Gate-source voltage as a function of gate charge; typical values





Fig. 16. Source current as a function of source-drain voltage; typical values

11. Test information

 $V_{GS} = 0 V$

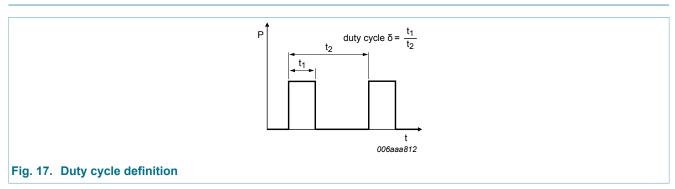

BSS138AKA

All information provided in this document is subject to legal disclaimers.


60 V, single N-channel Trench MOSFET

11.1 Quality information

This product has been qualified in accordance with the Automotive Electronics Council (AEC) standard Q101 - Stress test qualification for discrete semiconductors, and is suitable for use in automotive applications.


60 V, single N-channel Trench MOSFET

12. Package outline

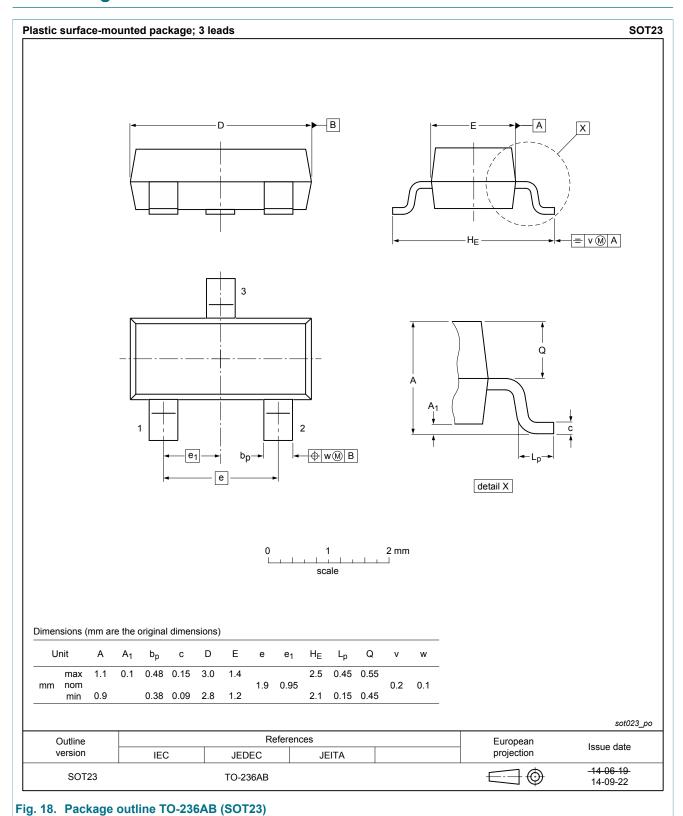

60 V, single N-channel Trench MOSFET

13. Soldering

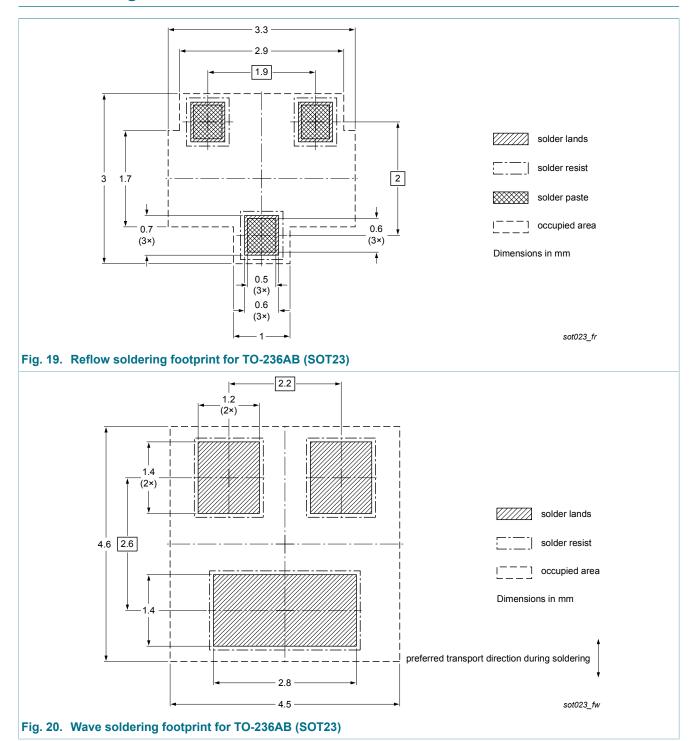

60 V, single N-channel Trench MOSFET

14. Revision history

Table 8. Revision history

Data sheet ID	Release date	Data sheet status	Change notice	Supersedes			
BSS138AKA v.3	20150429	Product data sheet	-	BSS138AKA v.2			
Modifications:	Figure 14: x-axis sc	Figure 14: x-axis scale corrected					
BSS138AKA v.2	20141103	Product data sheet	-	BSS138AKA v.1			
BSS138AKA v.1	20130206	Product data sheet	-	-			

60 V, single N-channel Trench MOSFET

15. Legal information

15.1 Data sheet status

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

15.2 Definitions

Preview — The document is a preview version only. The document is still subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

15.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use in automotive applications — This Nexperia product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

BSS138AKA

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2017. All rights reserved

60 V, single N-channel Trench MOSFET

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

15.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

60 V, single N-channel Trench MOSFET

16. Contents

1	General description	1
2	Features and benefits	1
3	Applications	1
4	Quick reference data	1
5	Pinning information	2
6	Ordering information	2
7	Marking	2
8	Limiting values	3
9	Thermal characteristics	4
10	Characteristics	6
11	Test information	9
11.1	Quality information	10
12	Package outline	11
13	Soldering	12
14	Revision history	13
15	Legal information	14
15.1	Data sheet status	14
15.2	Definitions	14
15.3	Disclaimers	14
15.4	Trademarks	15

© Nexperia B.V. 2017. All rights reserved

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com Date of release: 29 April 2015

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Nexperia:

BSS138AKAR